




THE EP10 BLOWER

A belt-driven centrifugal blower for industrial drying and air handling applications.

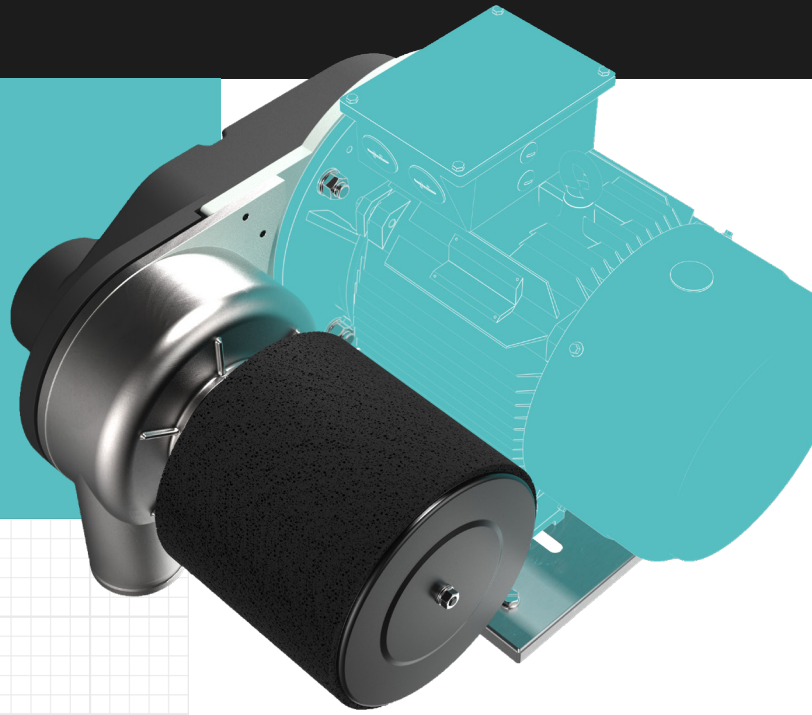

Key Features

Reliable Performance - Consistent airflow output for stable drying at varying line speeds.

Flexible Motor Power Options - Range from 5.5 to 15 kW.

Compact & Efficient - Small blower footprint without compromising performance.

Enclosure Compatible - Pairs with modular enclosures to reduce noise and contain spray.


Applications

Air supply for bottle labelling and sleeving systems.

Process air for vision inspection drying.




Air supply for shrink wrap and secondary packaging dryers.

Process air for vision inspection.

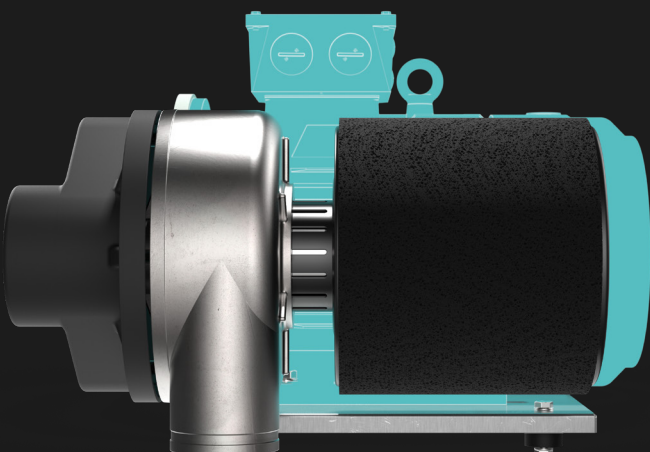

Outline Drawing

Technical Data

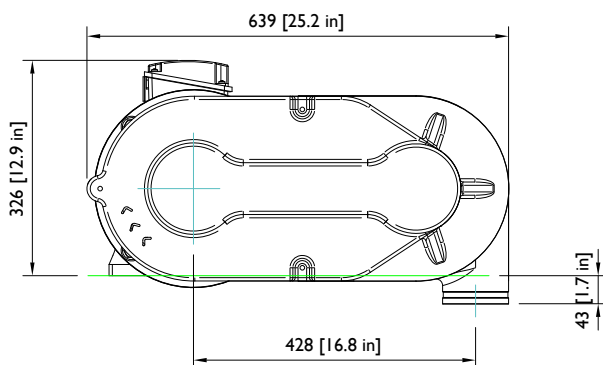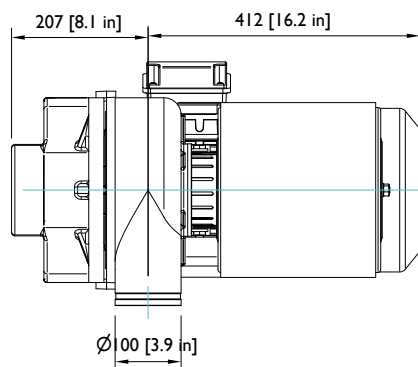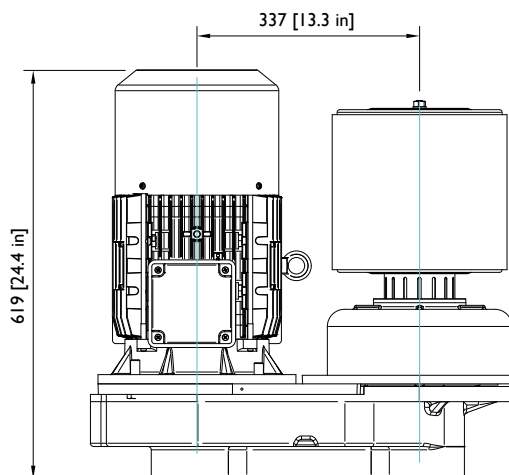

Energy Consumption

5.5 to 15 kW

Power Supply

3ph 400/460V 50/60Hz

Motor

Induction type / TEFC / IP55

Weight

70-100 kg

Noise Level

90 dB(A) @1 metre

Standards

CE/UKCA compliant

*MTBF and MTTR are
available upon request*

Contact Details

Hyroic Systems

Tel: +44 (0)1297 630960

Email: sales@hyroicsystems.com

Web: hyroicsystems.com